



SOLIDRILL DHD340 HAMMER

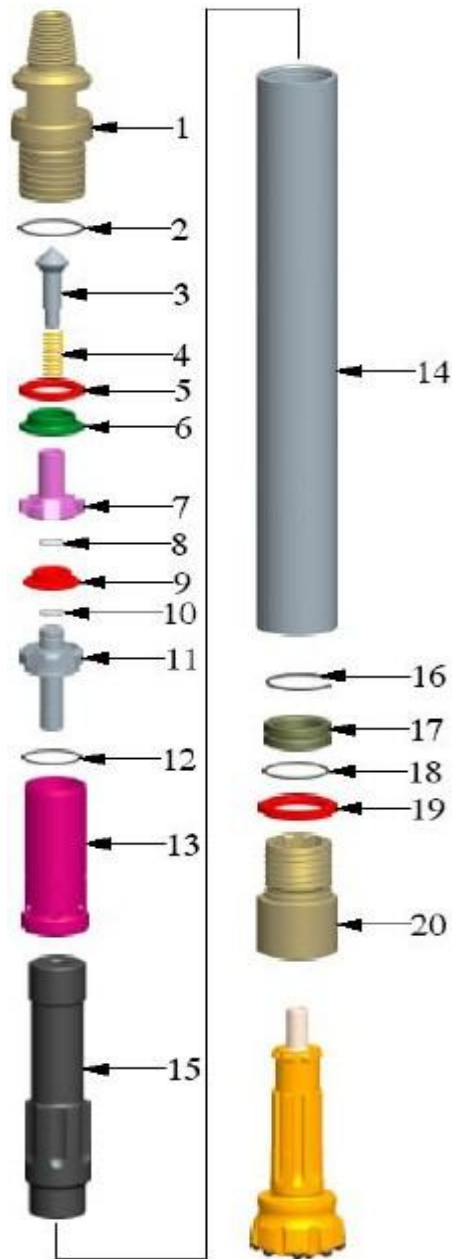

| ITEM | PART NAME | PART NO |
|------|------------------------------|----------|
| 1 | Top Sub | SD-40-01 |
| 2 | O-Ring For Top Sub | SD-40-02 |
| 3 | Check Valve | SD-40-03 |
| 4 | Spring | SD-40-04 |
| 5 | Buffer Ring | SD-40-05 |
| 6 | Top Sub Spacer | SD-40-06 |
| 7 | Top Valve | SD-40-07 |
| 8 | O-Ring For Top Valve | SD-40-08 |
| 9 | Flapper Valve | SD-40-09 |
| 10 | O-Ring For Flapper Valve | SD-40-10 |
| 11 | Bottom Valve | SD-40-11 |
| 12 | O-Ring For Bottom Valve | SD-40-12 |
| 13 | Liner | SD-40-13 |
| 14 | Wear Sleeve | SD-40-14 |
| 15 | Piston | SD-40-15 |
| 16 | Snap Ring | SD-40-16 |
| 17 | Bit Retainer Ring | SD-40-17 |
| 18 | O-Ring For Bit Retainer Ring | SD-40-18 |
| 19 | Drive Sub Spacer | SD-40-19 |
| 20 | Drive Sub | SD-40-20 |

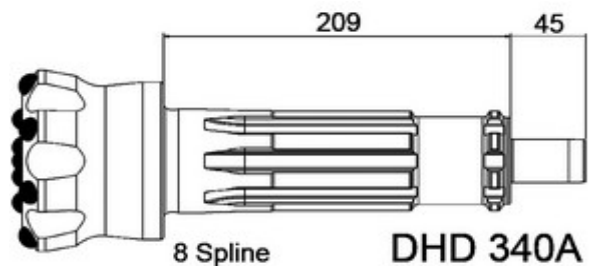

| HAMMER SPECIFICATIONS | | AIR CONSUMPTION | | | |
|-----------------------|----------------|-----------------|------|-----|--------|
| | | PSI | BAR | CFM | M3/min |
| WEIGHT | 37 kg | 150 | 10,3 | 280 | 7,9 |
| LENGTH | 1000 mm | 200 | 13,8 | 350 | 9,9 |
| HAMMER DIAM. OUTSIDE | 98 mm | 250 | 17,2 | 430 | 12,2 |
| MAX WORKING PRESSURE | 24 bar | 300 | 20,7 | 500 | 14,7 |
| THREAD | 2" 3/8 API REG | 350 | 24,1 | 620 | 17,6 |