



SOLIDRILL DHD3.5 HAMMER

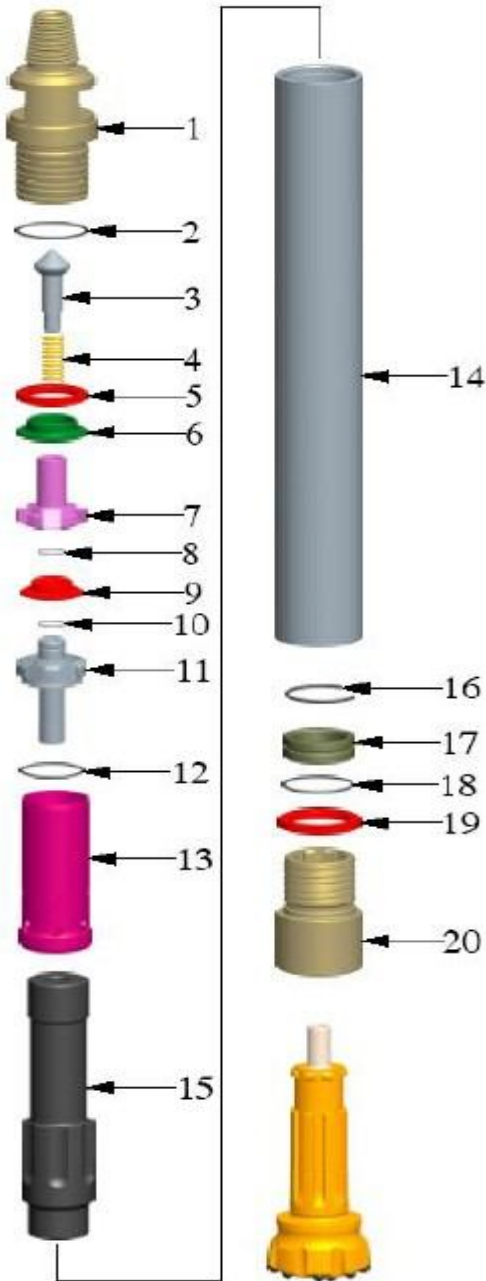

ITEM	PART NAME	PART NO
1	Top Sub	SD-35-01
2	O-Ring For Top Sub	SD-35-02
3	Check Valve	SD-35-03
4	Spring	SD-35-04
5	Buffer Ring	SD-35-05
6	Top Sub Spacer	SD-35-06
7	Top Valve	SD-35-07
8	O-Ring For Top Valve	SD-35-08
9	Flapper Valve	SD-35-09
10	O-Ring For Flapper Valve	SD-35-10
11	Bottom Valve	SD-35-11
12	O-Ring For Bottom Valve	SD-35-12
13	Liner	SD-35-13
14	Wear Sleeve	SD-35-14
15	Piston	SD-35-15
16	Snap Ring	SD-35-16
17	Bit Retainer Ring	SD-35-17
18	O-Ring For Bit Retainer Ring	SD-35-18
19	Drive Sub Spacer	SD-35-19
20	Drive Sub	SD-35-20

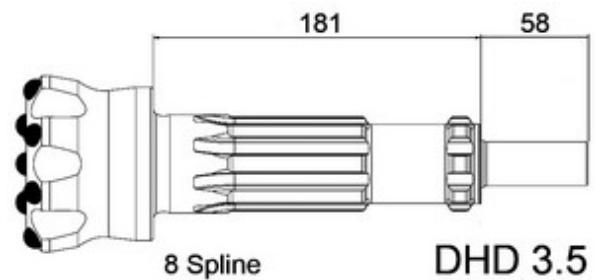

HAMMER SPECIFICATIONS		AIR CONSUMPTION			
		PSI	BAR	CFM	M3/min
WEIGHT	21 kg	150	10,3	260	7,3
LENGTH	855 mm	200	13,8	310	8,7
HAMMER DIAM. OUTSIDE	78 mm	250	17,2	385	10,8
MAX WORKING PRESSURE	24 bar	300	20,7	450	12,7
THREAD	2" 3/8 API REG	350	24,1	570	16,1